

# Silhouette® FR Window Shadings



Silhouette® FR

**HunterDouglas**   
Window Coverings

# Silhouette® FR Window Shadings

Silhouette® FR Window Shadings combine the advantage of draperies and shades into a single beautiful window covering. Silhouette shadings have soft fabric vanes suspended between two sheers to produce the soft, elegant look of a sheer with the light control of a blind.



## FABRIC

- 3" Bon Soir™ Light-Dimming

**Recommended applications:** Light-Dimming

## KEY FEATURES

- Silhouette shadings retract into headrail for unobstructed views
- No cords run through the fabric to detract from its simple elegance.
- GREENGUARD Gold Certified for low-emitting products
- Passes NFPA 701 Small Scale Flammability testing
- For safety, EasyRise™ continuous cord loop and cord tensioner anchor cord at side of window or motorized shade without cord




# Silhouette® FR Window Shadings

## KEY FEATURES

### Light Control

- Soft fabric vanes are suspended between two sheer fabric
- Vanes tilt for variable light control and privacy
- Transform harsh direct sunlight into soft light in a room while maintaining a clear view-through
- Provide protection from ultraviolet ray up to 88% with opened vanes and 99% with closed vanes

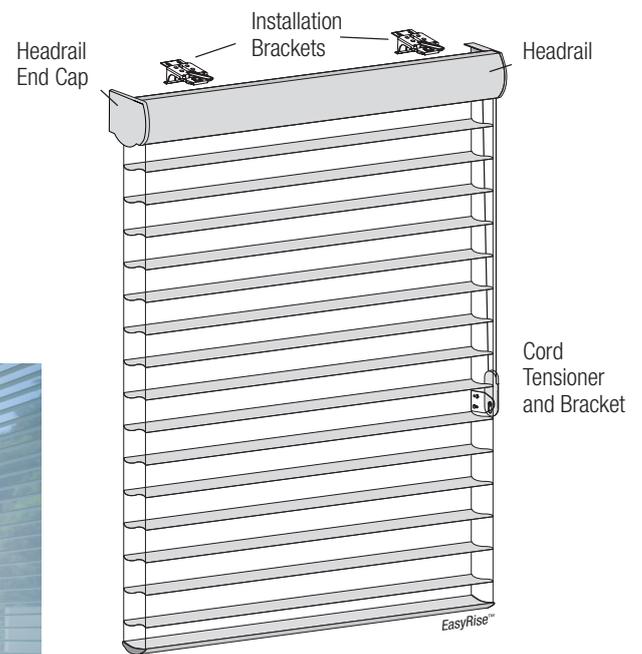

### Anti - Moire Effect.



- Moiré occurs when two sheer fabrics obstruct view-through and create a visual “swirling effect” in the fabric.
- Silhouette® Window Shadings feature patented anti-moiré fabrics which offer better view-through.

# Silhouette® FR Window Shadings

PROPERTY	REFERENCE	REQUIREMENT
Width	R1200014, R1200016	3.000" - 3.031" (9130) 4.25" (9560)
Flammability	1999 Small Scale NFPA	Avg. weight loss ≤40% Avg. drip residual flame ≤1.0 sec
Basis Weight	ASTM D3776-85, Option B	2.6 +/- 0.2 oz/yd <sup>2</sup>
Thickness	ASTM D17777-64	0.012" +/- 0.001"
Heat Shrinkage	Hunter Douglas Test Method TL600-93	MD: 1.3% max CD: 1.3% max
Optical Density	-	Greater than 4.0
High Humidity	Hunter Douglas Test Method 158°F /100% RH /100 hours	No delamination or deterioration of metal on film

## EASYRISE™

### Width

Minimum	300mm
Maximum	2900 mm

### Height

Minimum	400 mm
Maximum, Bon Soir™	2800 mm

## HARD-WIRED MOTORIZATION

### WITH SWITCH OR REMOTE CONTROL

### Width

Minimum	800 mm
Maximum	2900 mm

### Height

Minimum	600 mm
Maximum	5500 mm

## ENERGY EFFICIENCY

### Silhouette® FR Window Shadings Light-Dimming Vanes

Insulation	★ ↓
Solar Heat Control	★★
Daylighting	★★★★★
Ultraviolet Protection	★★★★★
Sound Absorption	★★



# Silhouette® FR Window Shadings

## A21 - Bon Soir™ - Light Dimming

A21-137 - Seclusion White  
A21-149 - Candle Glow  
A21-152 - Counting Sheep  
A21-153 - Moonlight  
A21-195 - Stardust  
A21-196 - Twilight  
A21-107 - Honey Beige  
A21-116 - Turtle Dove  
A21-148 - White Dove  
A21-198 - Cool Slate  
A21-199 - Summer Khaki

*NOTE: Please refer to Silhouette Collection Book for fabric colour and texture.  
A21 is same range with A6 but with FR specification.*

*NOTE: Silhouette also available in wide range at non-FR fabric. Please contact Hunter Douglas for advice.*

## DESIGN OPTIONS

### Easyrise™

This continuous cord loop and clutch assembly makes operating large shades easier.

### Motorization


Versatile range of motors and controls to maximize shading benefits without cords.



# Silhouette® FR Window Shadings

SILHOUETTE - EASYRISE™

## Classic Single

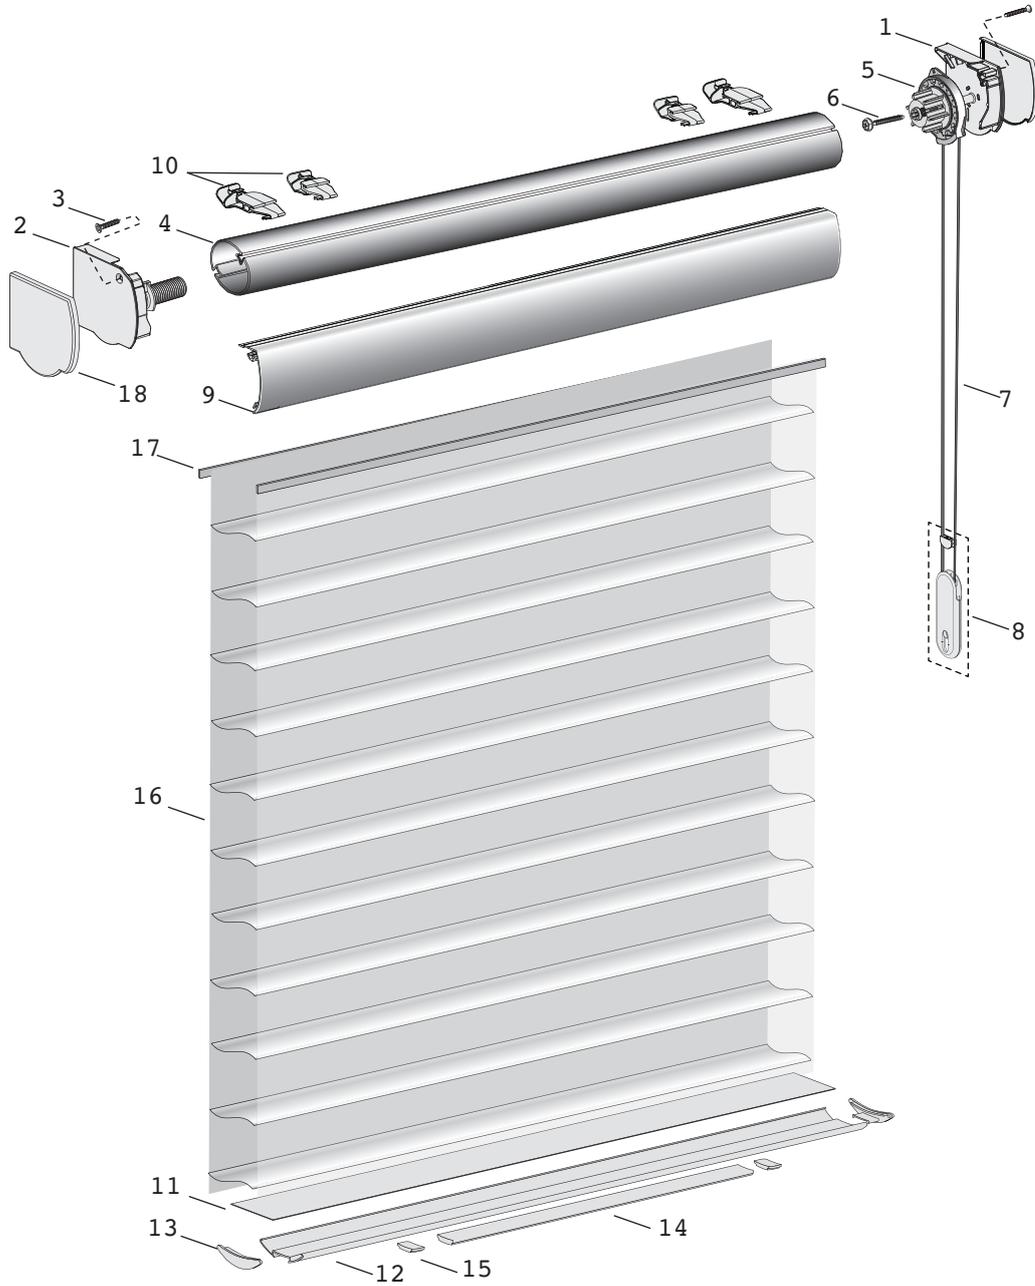

### Standard Parts

- |   |                             |                         |
|---|-----------------------------|-------------------------|
| 1. Headrail End Plate                               | 7. Cord Loop                | 15. Weight Clips        |
| 2. Idler Assembly                                   | 8. Universal Cord Tensioner | 16. Fabric              |
| 3. Screw, FLH PHH #8-18 x 0.75"                     | 9. Headrail                 | 17. Polystrip With Tape |
| 4. Rotator Rail, 0.050 LW,<br>Universal             | 10. SU Std. Top Limit       | 18. Cover Set           |
| 5. RB Clutch ER                                     | 11. Bottom Slat             |                         |
| 6. Screw (Clutch), #10 x 1 3/8"<br>SHWH Zinc-Plated | 12. Bottom Rail             |                         |
|   | 13. Bottom Rail End Caps    |                         |
|   | 14. Balance Weight          |                         |

# Silhouette® FR Window Shadings

## Motorization





## Standard Parts

- |                         |                                      |
|-------------------------|--------------------------------------|
| 1. Motor                | 8. Balance Weight                    |
| 2. Wheel and Crown      | 9. Weight Clips                      |
| 3. End Plug             | 10. Fabric                           |
| 4. End Plug Bracket     | 11. Polystrip With Tape              |
| 5. Bottom Slat          | 12. Cover Set                        |
| 6. Bottom Rail          | 13. Rotator Rail, 0.0501w, Universal |
| 7. Bottom Rail End Caps | 14. Headrail                         |

# Silhouette® FR Window Shadings

## HEADRAIL AND BRACKET SIZE

### Silhouette EasyRise™

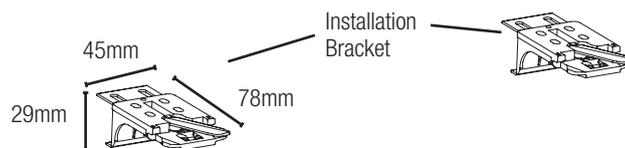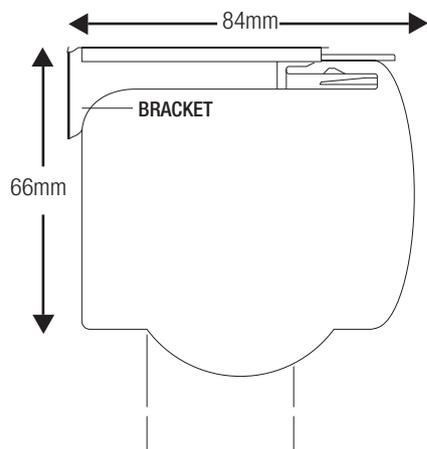

### Silhouette Motorization

